



# STRIKER CM500

Cone Crusher



Unlimited Solutions  
for Limited Resources

**MINING RANGE**

Tracked Cone Crushers



# Tracked Plant Features

## Belt Feeder

Feeding the materials into the Cone Crusher is a belt feeder. Contained under the loading area are impact rollers for loading shock absorption while the heavy-duty feeder belt feeds the cone via a hydraulic variable speed drive motor. Fitted into the conveyor is a metal detector to protect the cone from tramp metal.

## Feed Hopper

The feed hopper is manufactured from Hardox 400.

## Track Frame

The track is manufactured from heavy-duty frame steel having 4.2m longitudinal centres along with 500 wide tracks as a standard with an overall track width of 3m.

## Forward Product Conveyor

The forward product conveyor or main conveyor is a 1200mm wide, troughed belt conveyor with a fixed tail section and a discharge height of 3.2m high. The belt is driven via a hydraulic drive motor.

## Product Transfer Chute

Fitted beneath the cone is the product transfer chute. This chute transfers the material passing the cone setting onto the forward product conveyor.

## Powerpack

CATERPILLAR model C15 engine with electronic governing and emission control powers the plant. Rated at 525 bHP (390 kW) @ 2000 rpm designed to drive the cone via a KPTO transmission.

## Cone

Striker is able to produce a machine with a unique combination of providing higher capacity and superior product quality. With proven revolutionary designs, the cones provide unbeatable performance on secondary, tertiary and quaternary applications and help achieve the highest possible levels of profitability. The cone offers the highest capacities for their size in the industry.


Technology allows the ability to operate at a fixed mechanical setting - instead of the head floating on a column of hydraulic oil - creates less drift and provides more stability throughout the circuit. These series of cone crushers enable the customer to produce a finer product with fewer crushing stages, lowering the capital costs and the amount of waste and also energy.

The cone offers such features dual-acting hydraulic tramp release cylinders, large clearing stroke, self-tightening helix on the upper section of the bowl liner and self-tightening lock bolts on the mantle. Hydraulic motors rotate the bowl for fine control setting adjustments with high performance, non contacting labyrinth seals providing high reliability by keeping out dust without wearing out.

There is excellent wear protection for all components on the crusher. The head ball, mainframe seat liners, mainframe pin bushings, countershaft box frame ring, counterweight guard, mainframe liners and dead-bed feed hopper are all replaceable items, keeping maintenance costs to a minimum.

## Options

Special features are available depending on the client's requirements. Engine fire suppression, dust suppression, optimax feed controller.

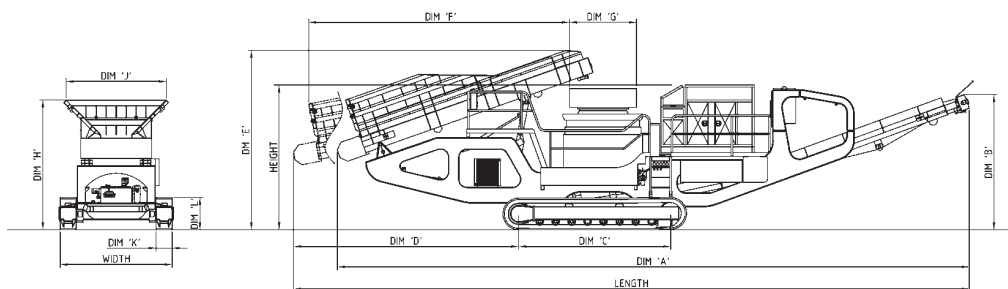

MODEL	WORKING DIMENSIONS											TRANSPORT			
	A	B	C	D	E	F	G	H	J	K	L	WIDTH	HEIGHT	LENGTH	WEIGHT
CM 500	16000	3390	3800	5950	4485	6525	1675	3250	2520	400	820	3000	4000	17300	47 T

\* - WEIGHT VARIABLE WITH OPTIONS

### STRIKER AUSTRALIA Pty Ltd

Perth Office: 9 Egmont Road Henderson WA 6166, Australia Ph: +61 8 9437 3533 Fax: +61 8 9437 3544

Brisbane Office: 26 Leonard Crescent Brendale Queensland 4500, Australia Ph: +61 7 3881 1227 Fax: +61 7 3881 1996

### STRIKER CRUSHING & SCREENING Sdn. Bhd.

Malaysia Office: Plot No. 44, PT8286, Jalan Johan 2/4, Estate Perindustrian Pengkalan 2, Fasa 2, 31550 Pusing, Batu Gajah, Perak. Ph: +605 366 8188 Fax: +605 365 2688

### STRIKER ENGINEERING MACHINERY (SHENYANG) Co., Ltd.

China Office: Room 3010, Royal WanXin International Mansion, 110003 Shenyang, China. Ph: +86 (24) 2353 4388 Fax: +86 (24) 2353 4288

E-mail: info@strikercrushing.com Website: www.strikercrushing.com

All reasonable steps have been taken to ensure the accuracy of this publication. However, due to our policy of continual product development, Striker reserve the right to change details without prior notice. All machines supplied in accordance with our standard conditions. Illustrations and photos may show optional equipment.

