



# STRIKER SMI862

Screen



Unlimited Solutions  
for Limited Resources

**MINING RANGE**

Tracked Screen



# Tracked Plant Features

## Main Chassis

Main chassis members are constructed from welded beams. These members are engineered to withstand the stresses exerted upon them by both road transport and operation of the plant. The chassis supports all the individual items of the plant and has integral onboard hydraulic stabilising systems for ease of setup on site.

## Belt Feeder

The belt feeder is 1200mm wide 4-ply belt. The feeder is positioned beneath the hopper and grizzly. Power is provided to the feeder via a hydraulic motor and gearbox arrangement. The feeder is fitted with head and return scrapers. The feeder belt is variable speed using a flow controller.

## Feed Hopper

With nine (9) cubic metre capacity and hydraulic tipping grizzly, this hopper is ideal for achieving maximum production with this plant. The top section of the grizzly is operated via a remote control. Material is loaded from the side of the hopper.

## Track Frame

is manufactured from heavy-duty frame steel with 4.1m longitudinal centres along with 500 wide tracks as standard with an overall track width of 3m.

## Screen Feed Conveyor

A 1200-mm wide 3-ply conveyor transfers material from the feeder up to the 20 x 7 2-deck screen. The conveyor is fitted standard with guide rollers. The main frame for the conveyor is supported on the chassis and has a folding head section for lowering during transport of the plant.

## Forward Product Conveyor

Tail conveyor consists of a 1500mm (60") wide 3-ply conveyor belt mounted under the screen to stockpile the bottom size product, which passes through the screen bottom deck. This conveyor is direct driven by a large capacity hydraulic motor. The tail conveyor folds and retracts for transport by hydraulic means.

## Side Discharge Conveyors


Any material not passing the bottom deck will be diverted onto the side discharge conveyors. Side conveyors consist of a 900mm (36") wide 3 ply conveyor belts fitted to a heavy duty folding conveyor frame. Side conveyors fold for transport by hydraulic means. Hydraulic drive to conveyor head-drum is provided by direct drive motor and speed control is achieved by a flow control valve mounted in the power unit control panel. Both conveyors are fitted with chevron belts. The side product conveyors stack to a height of 4.5 metres and are 18 metres in total width from head drum to head drum.

## Powerpack

The engine is a CAT C4.4 diesel engine 96kW. The power unit is completely enclosed, and lockable. The engine is equipped with the latest electronics and emission technology. Engine diagnostics and readouts are displayed on the Plant Control Screen. An 600-litre fuel tank positioned in the middle of the chassis under the main screen feed conveyor.

## Screen Box

18ft x 6ft Dual Deck Vibrating Screen. The screen is set up to accept either cross-tensioned steel wire meshes or rubber cross tensioned. Bolt in hardox liners are provided in the feed area to protect the screen side plates from erosion. The screen is isolated on coil springs at 20° decline, supported front and rear. The shaft drive is coupled to a hydraulic drive motor. Both sides and the back of the screen are accessible by walkways and ladders fitted to the screen support structure.

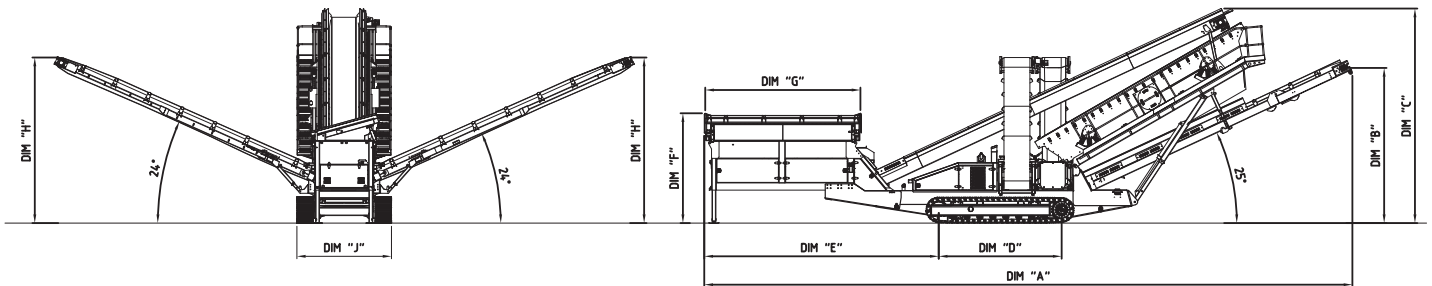

MODEL	WORKING DIMENSIONS										TRANSPORT			
	A	B	C	D	E	F	G	H	J	WIDTH	HEIGHT	LENGTH	WEIGHT	
SM1862	19990	4790	6625	3800	7230	3390	4800	5115	2920	3100	3400	18300	37.2 T	

\*- WEIGHT VARIABLE WITH OPTIONS



### STRIKER AUSTRALIA Pty Ltd

Perth Office: 9 Egmont Road Henderson WA 6166, Australia Ph: +61 8 9437 3533 Fax: +61 8 9437 3544

Brisbane Office: 26 Leonard Crescent Brendale Queensland 4500, Australia Ph: +61 7 3881 1227 Fax: +61 7 3881 1996

### STRIKER CRUSHING & SCREENING Sdn. Bhd.

Malaysia Office: Plot No. 44, PT8286, Jalan Johan 2/4, Estate Perindustrian Pengkalan 2, Fasa 2, 31550 Pusing, Batu Gajah, Perak. Ph: +605 366 8188 Fax: +605 365 2688

### STRIKER ENGINEERING MACHINERY (SHENYANG) Co., Ltd.

China Office: Room 3010, Royal WanXin International Mansion, 110003 Shenyang, China. Ph: +86 (24) 2353 4388 Fax: +86 (24) 2353 4288

E-mail: info@strikercrushing.com Website: www.strikercrushing.com

All reasonable steps have been taken to ensure the accuracy of this publication. However, due to our policy of continual product development, Striker reserve the right to change details without prior notice. All machines supplied in accordance with our standard conditions. Illustrations and photos may show optional equipment.